

Cro

VIVAX

Made for you

VIVAX VOX

VIVAX

Model : BS-90



Ean code


3856005181810

VIVAX

SPEAKER SYSTEM
BS-90



OPIS	
Bluetooth prijenosni zvučnik, USB reproduktor; MP3; FM Radio s memorijom ; AUX LINE in 3,5mm ; USB in; 8,5W RMS Audio izlaz (1x7,6cm zvučnik, 120Hz-15kHz), Napajanje: 1500mAh Punjiva baterija; Duboki i snažan zvuk, Punjenje putem Micro USB priključka, Do 6,5 sati reprodukcije (na srednjoj jačini)/ Do 2 sata na Maks. jačini; TWS funkcija uparivanja zvučnika za jači zvuk i bolji Stereo efekat; Bočna LED iluminacija	
SPECIFIKACIJE	
PLL FM Radio	Da
AM Radio	-
Auto Radio pretraga & Spremanje	Da
FM memorija	30
CD	-
Daljinski upravljač	-
LCD Zaslon	-
BBS (Bass boost sound)	Da
Equalizer funkcija	-
Sat	-
Auto Isključenje (ErP2 Reg.)	Da
Pojačalo	1.0Ch, 8,5W RMS
Frekventni raspon	120Hz - 15kHz +/- 3dB S/N:>70dB, Distortion: <0,1% 1kHz,1W
MULTIMEDIA	
MP3/WMA/FLAC/WAV/AAC	Da / - / - / - / -
Ostalo	TWS (True Wireless Stereo)-Uparivanje dva zvučnika za jači i širi Stereo zvuk ; LED bočna iluminacija

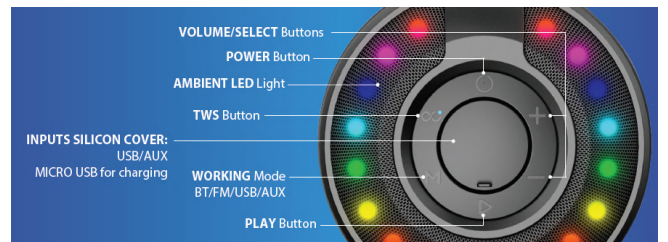

TERMINALI	
AUX-IN / AUX OUT	Da, 3,5mm / -
STEREO HEADPHONE in	-
USB	Da / MP3 Reprodukcija
FM Antena	Da, priključen Audio kabel
SD/MMC	-
Prekidač za Ukij./Isklj.	Mekane tipke
Wireless MIC / MIC1 / GUITAR	- / - / -
NAPAJANJE / DIMENZIJE	
Audio Snaga	1 x 8,5W RMS (120Hz-15kHz)
Zvučnici	1x Širokopojasni zvučnik 1x3" (2x7,6cm)
L x W x H dimenzija uređaja	278 x 156 x 117 mm
L x W x H dimenzija kutije	295 x 143 x 179 mm
Težina Bruto/Neto	1,25 / 1,18kg
Napajanje	Lithium Battery 1500mAh, 7,4V
Punjenje	Da, Micro USB priključak
Oprema	
Upute za uporabu	English, Croatian, Serbian, Macedonian, Albanian, Slovenian + local market languages
Daljinski upravljač	-
Pribor	Micro USB-USB kabel za punjenje, Audio AUX 3,5mm kabel, Uputa za uporabu

* Zbog različitih audio formata i verzije codec formata, moguće je da neće biti podržani svi navedeni formati. Proizvođač nije odgovoran za tako nastale probleme i to se ne smatra kvarom uređaja.

* Specifikacije proizvođača podložne su promjenama bez prethodne najave

